


slide units



carros de avance

SL30P.200

Feed	pneumatic
Avance	neumático
Stroke	200 mm
Carrera	200 mm
Thrust at 6 bar	2700 N
Empuje a 6 bar	275 Kg

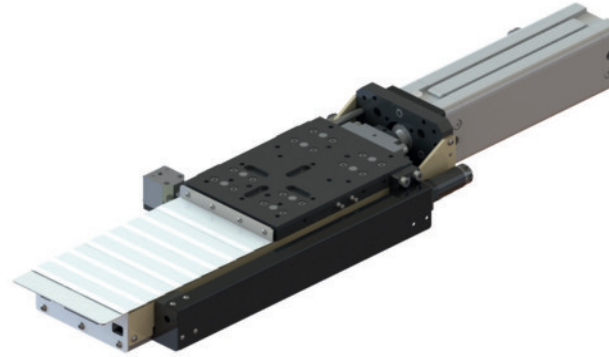

- Pneumatic slide unit.
- Pneumatic cylinder ø80 (1).
Optional: pneumatic cylinder ø100.
- Air inlet (2):
cylinder ø80 G3/8 - cylinder ø100 G1/2.
- Air consumption at 6bar:
cylinder ø80 14,1NL/cycle
cylinder ø100 22NL/cycle.
- Adjustable mechanical stop (3).
- Fast/slow stroke separately adjustable.
- Hydrocheck stroke 100mm (4).
- Front bellow cover.
- Magnetic sensors on cylinder (5).
Optional: 3 contacts limit switches (6).
- Prearranged to install unit SU20 - SU30 (7).
- Standard color: Beige RAL 1001.
Other colors on request.
- Weight from 48 Kg



- Mesa desplazable neumática
- Cilíndro neumático ø80 (1).
Cilíndro neumático ø100 bajo petición.
- Entrada aire (2):
cilíndro ø80 G3/8 - cilíndro ø100 G1/2.
- Consumo aire a 6bar:
cilíndro ø80 14,1NL/ciclo
cilíndro ø100 22NL/ciclo.
- Tope mecánico ajustable (3).
- Carrera rápida/lenta regulable por separado.
- Freno hidráulico 100mm carrera (4).
- Protección de fuelle con cuchillas anterior.
- Sensores magneticos sobre el cilindro (5).
Opcional: Final de carrera de 3 contactos (6).
- Predispuesta para la instalación husillos SU20 - SU30 (7).
- Color standard: Beige RAL 1001.
Otros colores bajo petición.
- Peso desde 48 Kg

