
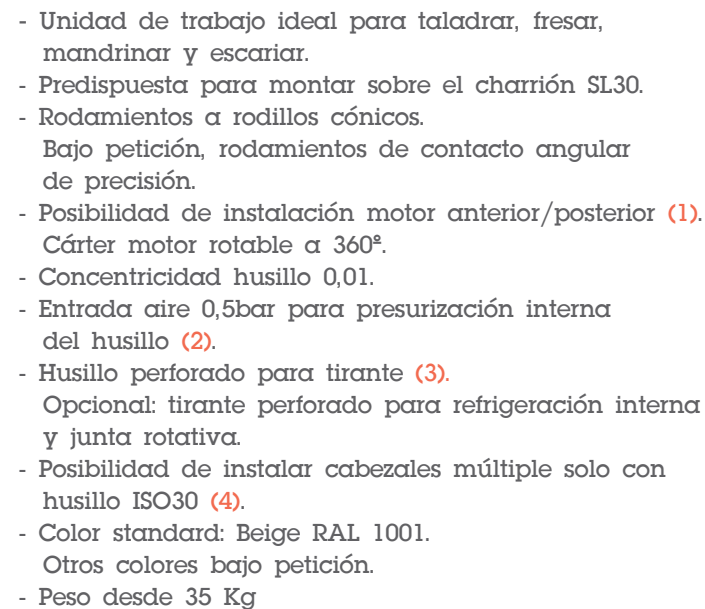


SU30

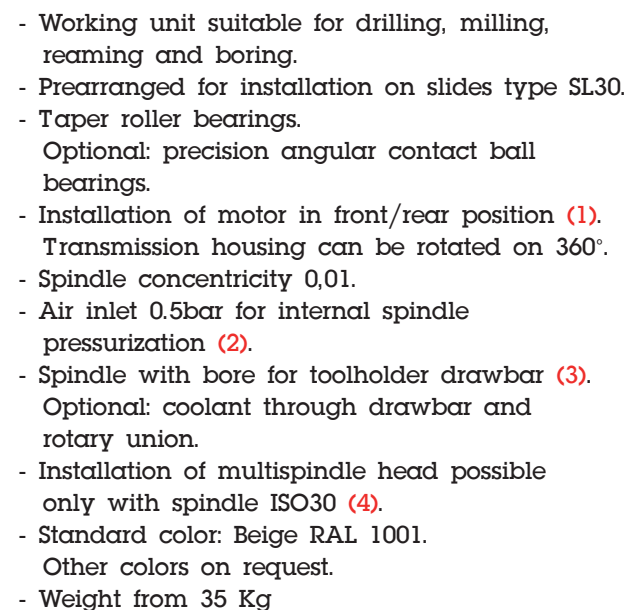

SU30


	spindle / husillo		rpm			motor / motor		motor type / tipo motor		motor position / posición motor
			50Hz	60Hz						
S3	ISO30 DIN2079	01	100	120	80...	motor reducer 0,75Kw 4 poles	S	230-400V-50/60Hz	F	front anterior
S4	ISO40 DIN2079	02	200	240	81...	motor reducer 1,50Kw 4 poles	A	brake motor motor freno	R	rear posterior
H6	HSK63-C DIN69893	03	300	360	076	90 B14 0,75Kw 6 poles	V	forced ventilation servoventilado		
		05	500	600	116	90 B14 1,10Kw 6 poles	AV	brake motor + forced ventilation motor freno + servoventilado		
		07	700	840	156	100 B14 1,50Kw 6 poles				
		08	800	960	226	112 B14 2,20Kw 6 poles				
		11	1100	1320	074	80 B14 0,75Kw 4 poles				
		15	1500	1800	114	90 B14 1,10Kw 4 poles				
T	roller bearing rodillos cónicos	22	2200	2640	154	90 B14 1,50Kw 4 poles				
		30	3000	3600	224	100 B14 2,20Kw 4 poles				
H	precision ball bearings contacto angular	40	4000	4800	304	100 B14 3,00Kw 4 poles				
		60	6000	7200	404	112 B14 4,00Kw 4 poles				
		85	8500	10200	072	80 B14 0,75Kw 2 poles				
					112	80 B14 1,10Kw 2 poles				
					152	90 B14 1,50Kw 2 poles				
					222	90 B14 2,20Kw 2 poles				
					302	100 B14 3,00Kw 2 poles				
					402	112 B14 4,00Kw 2 poles				

STANDARD COLOR


RAL 1001

OPTIONAL COLORS


RAL 1013	RAL 3028
RAL 1023	RAL 5015
RAL 2003	RAL 6018

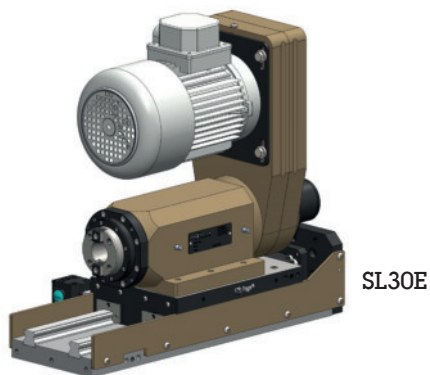

SL30E

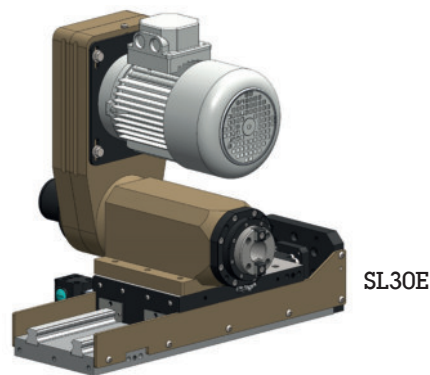

SL30E

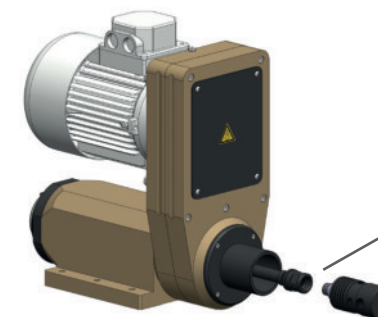

optional:

rotary union
M16x1,5 LH
junta rotativa
M16x1,5 LH